

FEATURES:

- Conform to ANSI/TIA 568.2-D, ISO/IEC 11801-1, ISO/IEC 60603-7-51 and EN 50173-1 Class Ea specifications
- Die-casting design for optimal EMI protection
- Shutter design to protect jack against ingress of dirt
- Slim size is ideal for interfaces where the spaces are tight
- Real ISO/IEC 11801 and EN 50173 short link performance guaranteed
- Multi-nodes consolidation cord, reliable end to end solution & high data traffic applications
- Free scissor attached per carton, for excessive cable cut and avoid field termination failure on "short"
- RoHS compliant



APPLICATIONS:


- 10GBASE-T Ethernet
- 1000BASE-TX Gigabit Ethernet
- 1000BASE-T Gigabit Ethernet
- 100BASE-TX Fast Ethernet
- 10BASE-T Ethernet
- Voice, Video and other applications

CHARACTERISTICS:


Dielectric Strength	1000V RMS for 1min
Current Rating	1.5Amp Max
Insulation Resistance	10MΩ Min
Contact Resistance	2mΩ per contact
Temperature Range	-10°C to 60°C
Humidity	10%~90%; non condensing
Admissible Conductor	22AWG ~ 26AWG insulation wire
Body Material	Housing: PC Body: Zinc Die-casting
Jack contact	Phosphor bronze, 50μ inch gold plated over nickel plated in contact area Operating life: Minimum 750 insertions
IDC Contacts	100μ inch nickel plated over phosphor bronze Operating life: Minimum 250 Re-terminations

TYPICAL PERFORMANCE:


EN50173 PL2 Class Ea

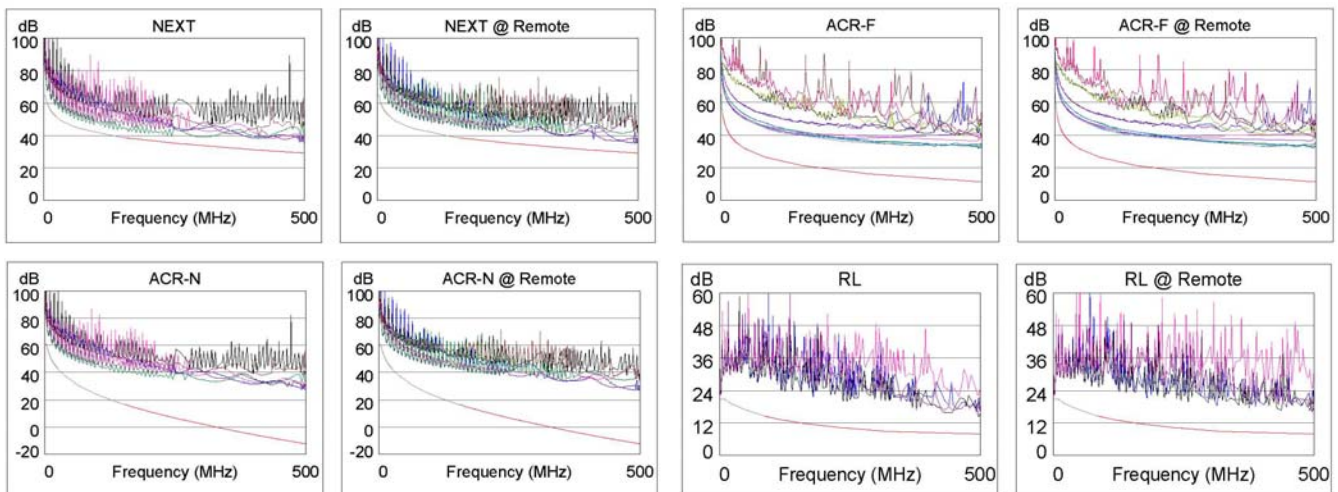

EN50173 PL3 Class Ea

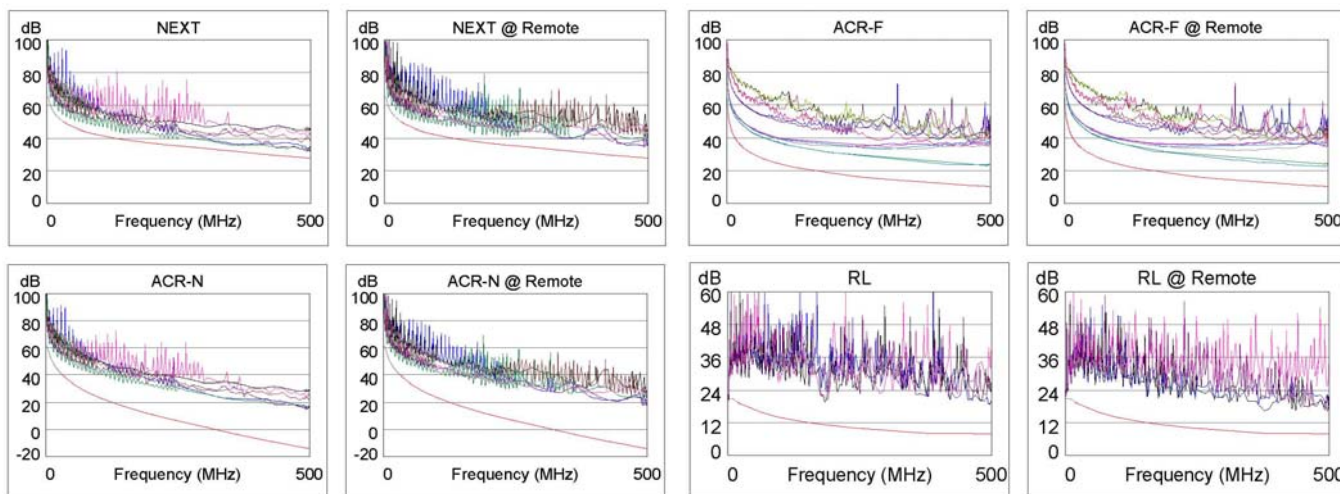

DRAWING:

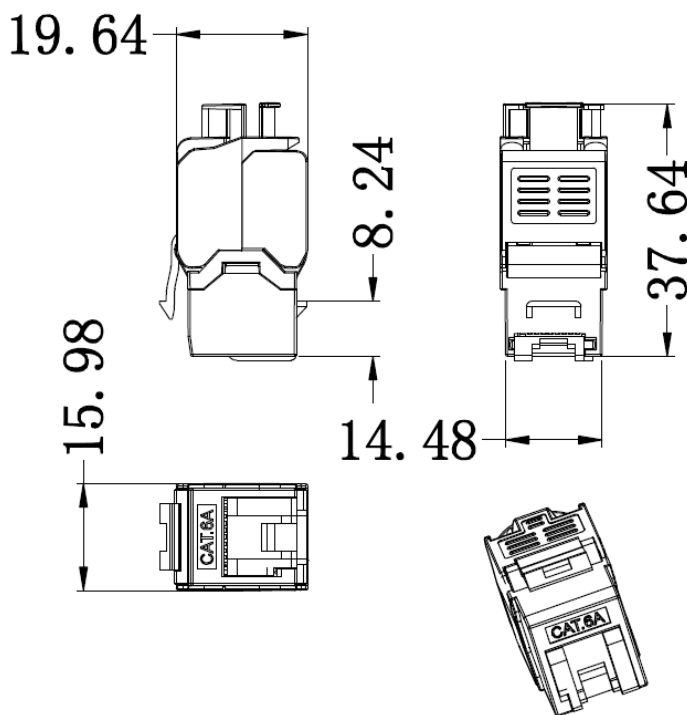

ORDERING INFORMATION:

Part NO. 109924010
 Description Cat.6A 180° shielded die-casting keystone jack, with shutter
 Packing 1pc/ PE bag, 40pcs/box, 400pcs/ carton
 carton size 53.8*35.2*27 cm weight N.W. 10.8 KG G.W. 12.6KG

Premium Line Systems GmbH reserves the right to change specifications without prior notice.

Premium-Line Systems GmbH. Rosenheimer Str.89 D-83064 Raubling. Germany

▶ TEL:+49(0)8035 9836 0 ▶ Fax:+49(0)8035 9836 22