

FEATURES:

Category 6A U/UTP Patch Cord is using:

- Central cross member for pair separation
- RJ45 contacts 50μ inch gold plated
- Molded snag proof boot

Compliant with Cat.6A standards as:

- ANSI/TIA 568.2-D:2018
- ISO/IEC 11801-1 Class Ea:2017
- IEC 61935-2:2010 (Edition 3.0)
- IEC 61156-6:2012
- CENELEC EN 50288-11-2:2015
- CENELEC EN 50173-1:2018


Compliant with safety standards as:

- IEC 60332-1-2:2004
- RoHS compliant (EU Directive 2011/65/EC)



CHARACTERISTICS:



Conductor	Material / size	Bare Copper / 24 AWG	
Insulation	Material	HDPE	
	Diameter	0.96 ± 0.05 mm	
Sheath	Material	PVC	LS0H
	Thickness	0.7 ± 0.1 mm	0.7 ± 0.1 mm
	Diameter	6.4 ± 0.3 mm	6.4 ± 0.3 mm
Operation Temperature		-20°C~+60°C	
Installation Temperature		0°C~+50°C	
Storage Temperature		-30°C~+60°C	

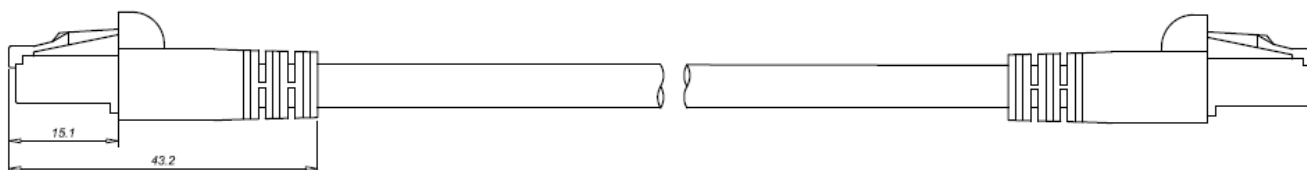

Part No. 1821xyyyz

Ver. 2101

Product Specification

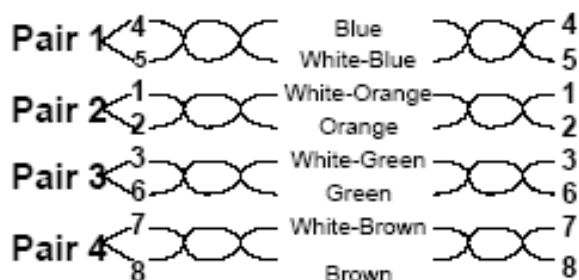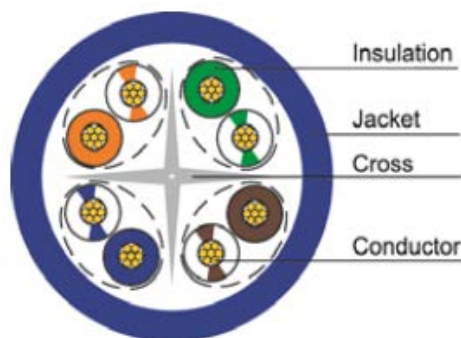

APPLICATION:

- 10G BASE-T Ethernet
- 1000BASE-TX Gigabit Ethernet
- 1000BASE-T Gigabit Ethernet
- 100BASE-TX Fast Ethernet
- 10BASE-T Ethernet
- Voice, Video and other applications

ORDERING INFORMATION:

Part No: 1821xyyyz

Description Cat.6A U/UTP 24AWG patch cord


x: sheath 1: PVC 2: LSOH

yyy: length 005: 0.5m, 010: 1.0m, 020: 2.0m, 030: 3.0m, 050: 5.0m, 070: 7.0m, 100: 10.0m

z: Color 1: white, 2: black, 3: red, 4: blue, 5: grey, 6: green, 8: yellow

Packing 1pc / PE bag

length	0.5m	1.0m	2.0m	3.0m	5.0m	7.0m	10.0m
quantity/carton	200pcs	150pcs	100pcs	70pcs	50pcs	40pcs	35pcs

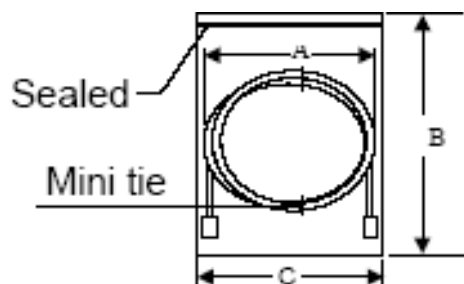

Packing	Length	$L \leq 3m$	$3m < L \leq 10m$	$10m < L$
	(A) mm	180+/-5	180+/-5	175~205
	Cable width			
	(B×C) mm	280×203	305×240	305×240
	PE bag size			
Carton size		42*42*25cm		

Premium-Line Systems GmbH, Rosenheimer Str.89, D-83064 Raubling, Germany

► TEL: + 49(0)8035 9836 0 ► Fax: + 49(0)8035 9836 22

Premium Line Systems GmbH reserves the right to change specifications without prior notice.