

FEATURES:

Category 6A U/UTP SlimLine Patch Cord is using:

- RJ45 contacts 50μ inch gold plated
- Assembly snag proof boot

Compliant with Cat.6A standards as:

- ANSI/TIA 568.2-D:2018
- ISO/IEC 11801-1 Class E_A:2017
- CENELEC EN 50173-1:2018
- CENELEC EN 50288-11-2:2015
- IEC 61935-2:2010 (Edition 3.0)
- IEC 61156-6:2012




Compliant with safety standards as:

- IEC 60332-1-2:2004
- RoHS compliant (EU Directive 2011/65/EC)

CHARACTERISTICS:

Conductor	Material / Size	Bare Copper / 30 AWG	
Insulation	Material	PE	
	Diameter	0.50 ± 0.05 mm	
Sheath	Material	PVC	LSOH
	Diameter	3.0 ± 0.2 mm	3.0 ± 0.2 mm
Operation Temperature		-20°C~+60°C	
Installation Temperature		0°C~+50°C	
Storage Temperature		-30°C~+60°C	

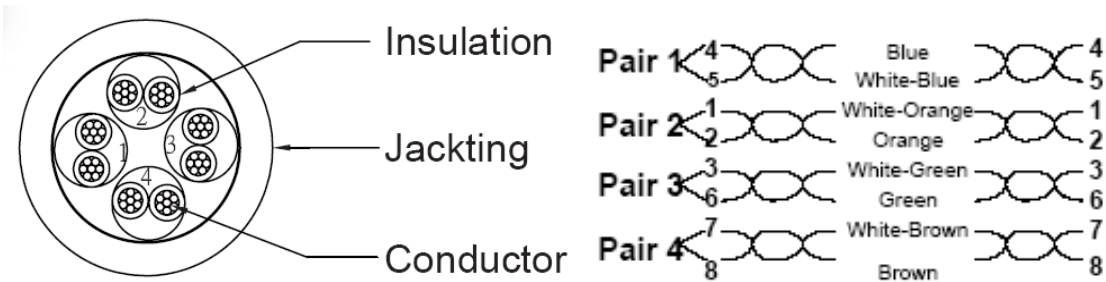

Premium Line Systems GmbH reserves the right to change specifications without prior notice.


APPLICATION:

- 10G BASE-T Ethernet
- 1000BASE-TX Gigabit Ethernet
- 1000BASE-T Gigabit Ethernet
- 100BASE-TX Fast Ethernet
- 10BASE-T Ethernet
- Voice, Video and other applications

ORDERING INFORMATION:

Part No: 1829xyyyz
 Description Cat.6A U/UTP SlimLine patch cord
 x: sheath 1: PVC 2: LSOH
 yyy: length 003: 0.3m, 005: 0.5m, 010: 1.0m, 020: 2.0m
 z: Color 1: white, 2: black, 3: red, 4: blue, 5: grey, 6: green, 8: yellow
 Packing 1pc / PE bag

length	0.3m	0.5m	1m	2m
quantity/carton	600pcs	550pcs	400pcs	300pcs

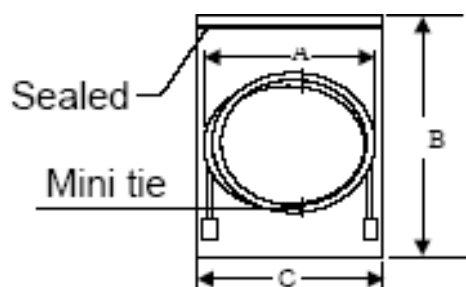

Packing	Length	$L \leq 2m$
	(A) mm	180+/-5
	Cable width	
	(B×C) mm	280×203
	PE bag size	
	Carton size	40*40*23cm

Premium-Line Systems GmbH, Rosenheimer Str.89, D-83064 Raubling, Germany

► TEL: + 49(0)8035 9836 0 ► Fax: + 49(0)8035 9836 22

Premium Line Systems GmbH reserves the right to change specifications without prior notice.