

FEATURES:

- Conform to ANSI/TIA 568.2-D, ISO/IEC 11801-1, EN 50173-1 Class Ea specifications
- Die-casting design for optimal EMI protection
- a range of colors to help color code your network
- simplifies management with clear color coding
- Multi-nodes consolidation cord, reliable end to end solution & high data traffic applications
- Free scissor attached per carton, for excessive cable cut and avoid field termination failure on "short"
- RoHS compliant

**APPLICATIONS:**


- 10GBASE-T Ethernet
- 1000BASE-TX Gigabit Ethernet
- 1000BASE-T Gigabit Ethernet
- 100BASE-TX Fast Ethernet.
- 10BASE-T Ethernet
- Voice, Video and other applications.

CHARACTERISTICS:


Dielectric Strength	1000V RMS for 1min
Current Rating	1.5Amp Max.
Insulation Resistance	10MΩ Min.
Contact Resistance	2mΩ per contact
Temperature Range	-10°C to 60°C
Humidity	10%~90%; non condensing
Admissible Conductor	22AWG ~ 26AWG insulation wire
Body Material	Housing: PC Body: Zinc Die-casting
Jack contact	Phosphor bronze, 20μ inch gold plated over nickel plated in contact area
IDC Contacts	Operating life: Minimum 750 insertions 100μ inch nickel plated over phosphor bronze Operating life: Minimum 250 Re-terminations

TYPICAL PERFORMANCE:


EN50173 PL2 Class Ea

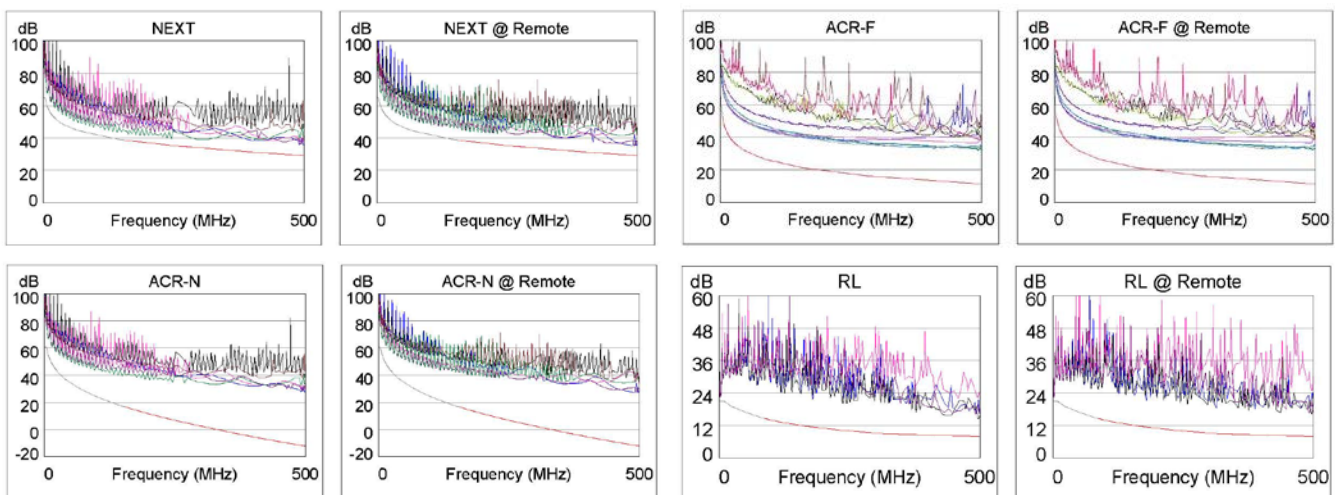

EN50173 PL3 Class Ea

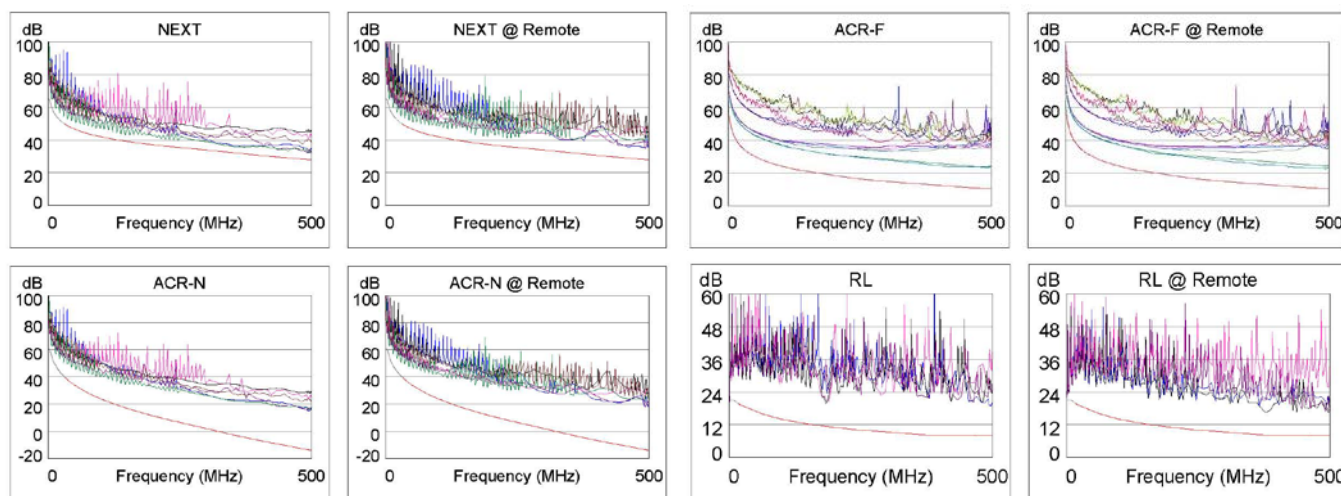

DRAWING:

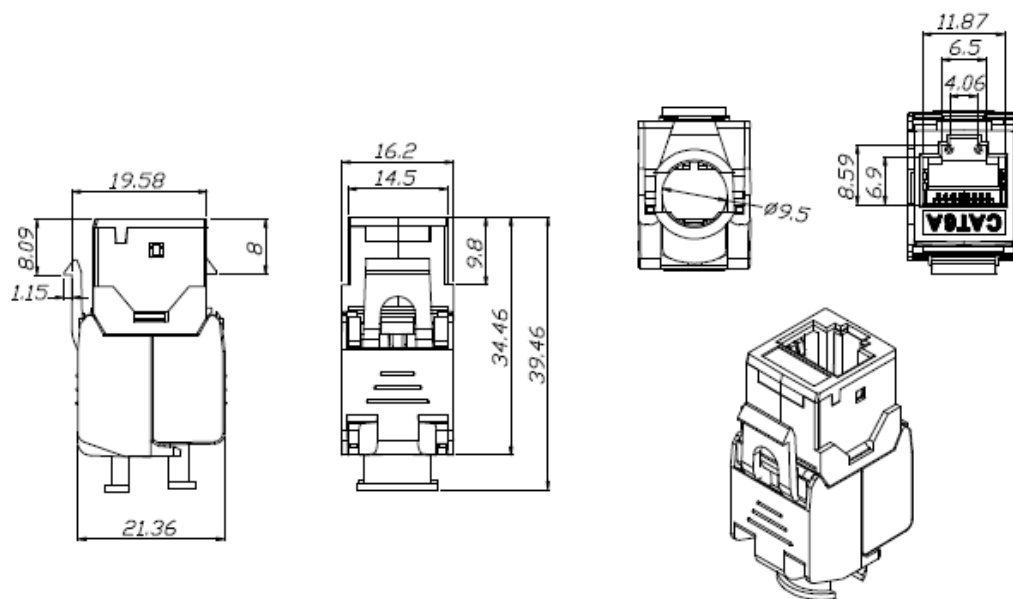

ORDERING INFORMATION:

Part NO.	1098240x3
Description	Cat.6A 180° shielded die-casting keystone jack, with color coding
x ,color	0: light green 3: red 4: blue 5: gray 6: green 7: orange 8: yellow 9: purple
Packing	1pc/ PE bag, 50pcs/box, 500pcs/ carton carton size: 57*35*22 cm weight N.W. 14.7 KG G.W. 15.7KG

Premium-Line Systems GmbH, Rosenheimer Str. 89, D-83064 Raubling, Germany

► TEL: + 49(0)8035 9836 0 ► Fax: + 49(0)8035 9836 22

Premium Line Systems GmbH reserves the right to change specifications without prior notice.