

FEATURES:

- Meeting the TIA/EIA-568.2-D, ISO/IEC11801 and EN50173-1 specifications
- Complying with category 6A patch cord testing performance requirements
- Connector accepts 22-26 AWG solid and stranded shielded cables
- Suitable for cables with an outer diameter of 6.0–8.2 mm
- Supporting T568 A&B wiring & easy installation
- Terminating cable without tools
- Ideal for industrial applications
- There is 8 directions (8 x 45°) can be rotated
- Temperature range: -10° to 60°



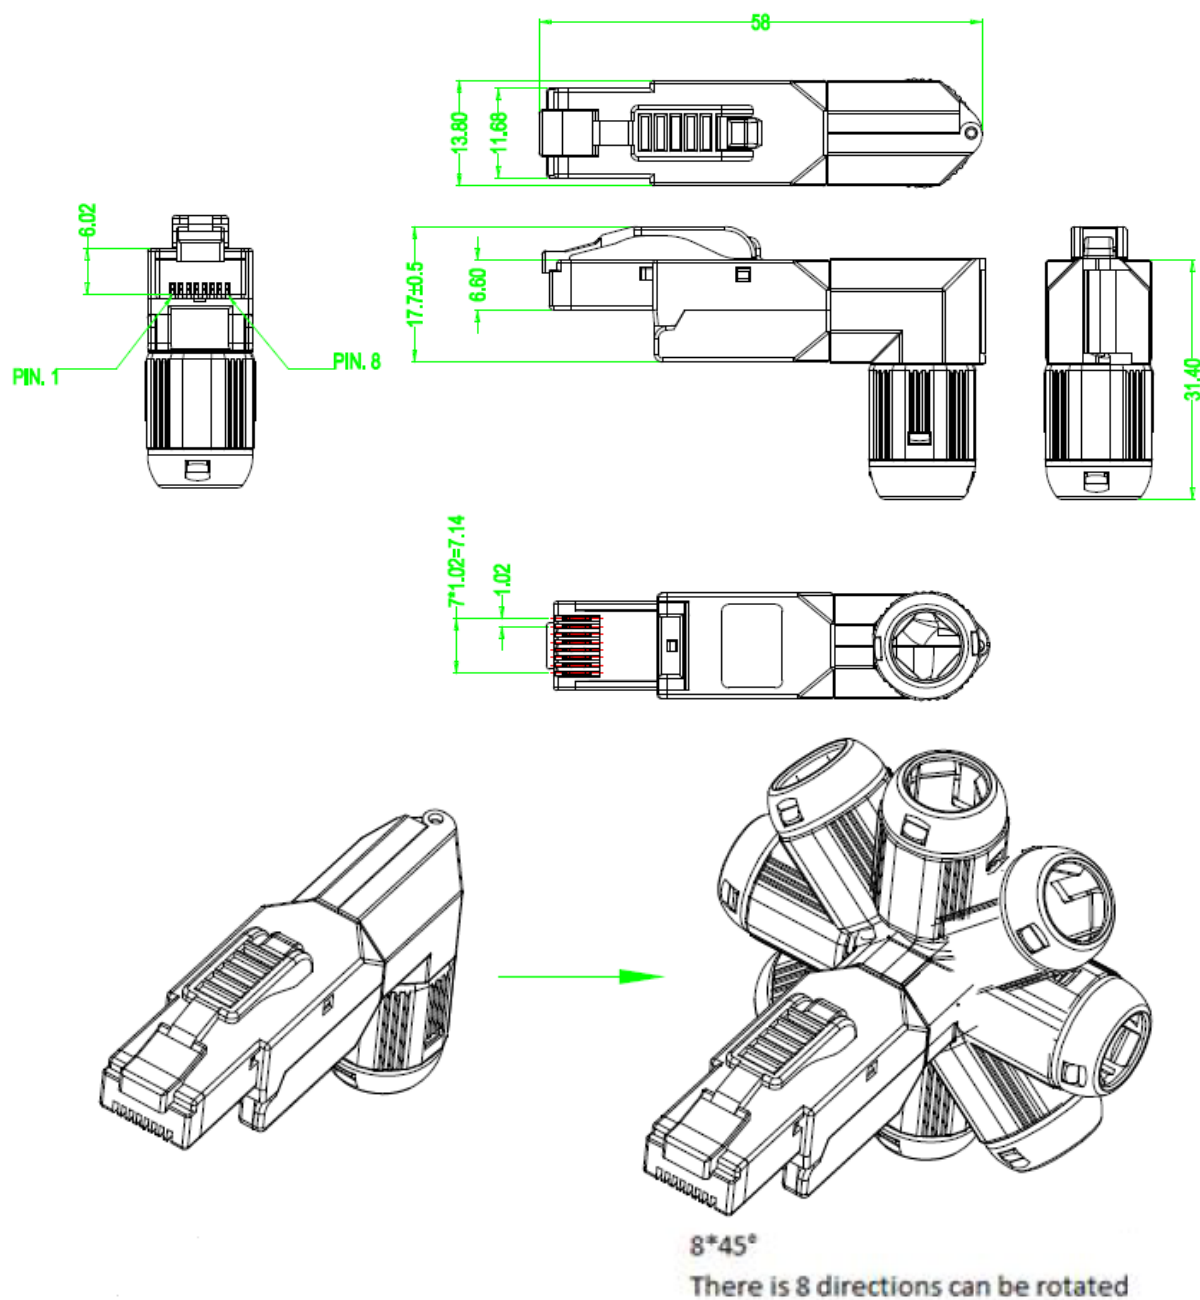
CHARACTERISTICS:

IDC Connector	Characteristics
Operating Life	Minimum 250 re-terminations
Contact Material	Phosphor bronze
IDC Contact Plating	100μ inch nickel plated
IDC Material	PC, UL94 V-0
RJ45 Plug	Characteristics
Contact Plating	50μ Inch Gold plated over Phosphor Bronze
Operating Life	Minimum 1500 re-insertion
Housing Material	PC, UL94 V-0
Printed Circuit Board	Characteristics
Materials	FR-4, UL94 V-0
Thickness	1.6 mm

APPLICATIONS:

- 10G BASE-T, 1000BASE-T/TX, 100BASE-TX, 10BASE-T
- Voice

Premium Line Systems GmbH reserves the right to change specifications without prior notice.

DRAWING:**ORDERING INFORMATION:**

Part NO.	159210011
Description	Cat.6A angled shielded toolless RJ45 plug
Packing	1pc/ box, 250pcs/ carton
	carton size: 53*31*23 cm weight N.W. 9.9 KG G.W. 11.6 KG

Premium Line Systems GmbH reserves the right to change specifications without prior notice.

Premium-Line Systems GmbH, Rosenheimer Str.89, D-83064 Raubling, Germany