

FEATURES:

- Premium Line Navigator Patch System technology allows a quick and accurate identification of the cable connection without affecting the network performance
- Just by connecting the Premium Line signal transmitter to the work area outlet, the LED on the Navigator Patch Panel will immediately indicate the related port
- IDC connector can accept 22-26 AWG solid and stranded cables
- Supports T568 A&B Wiring & Easy installation
- Dimensions and mounting compliant with EIA-310-D
- Panel material: SECC/1.5mm thickness
- Number of ports/height: 24/1U
- Color: black
- Easy port description by removable labels in plastic holders
- Incl. cable ties and set of screws (M6 x 12)
- RoHS compliant



CHARACTERISTICS:

IDC Connector:

| Item | Material or Feature |
|---------------------|-----------------------------|
| Operating life | Minimum 250 Re-terminations |
| Contact Material | Phosphor bronze |
| IDC Contact Plating | Tin plated over Nickel |
| IDC Plastic Housing | PC, UL94V-0 |

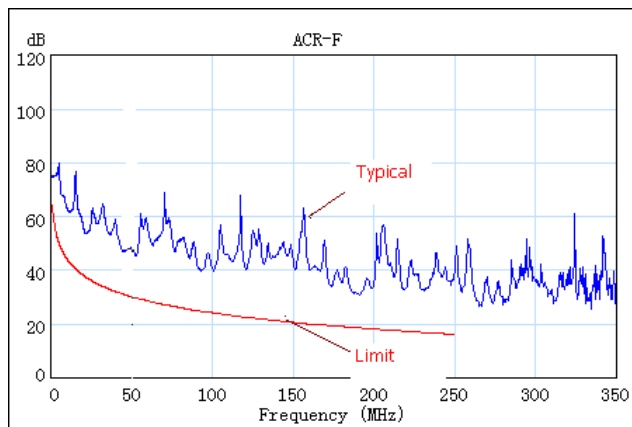
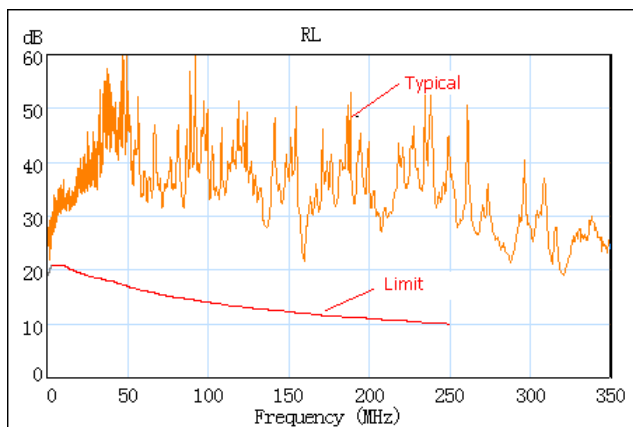
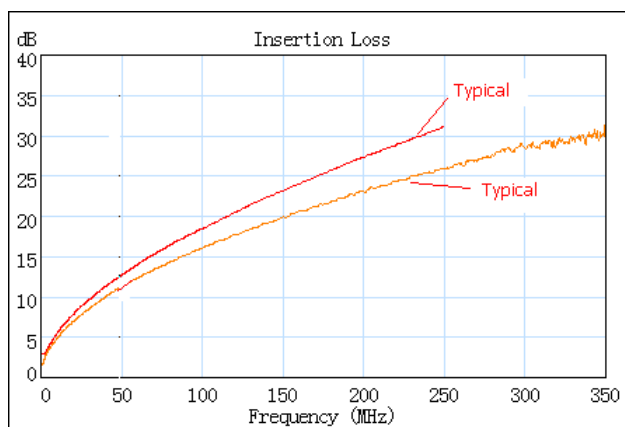
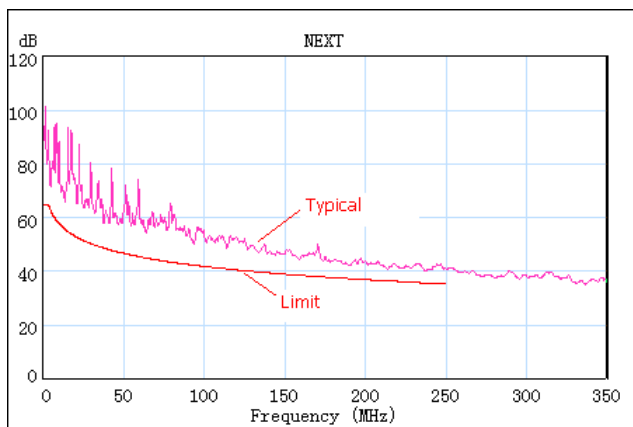
Jack Connector:

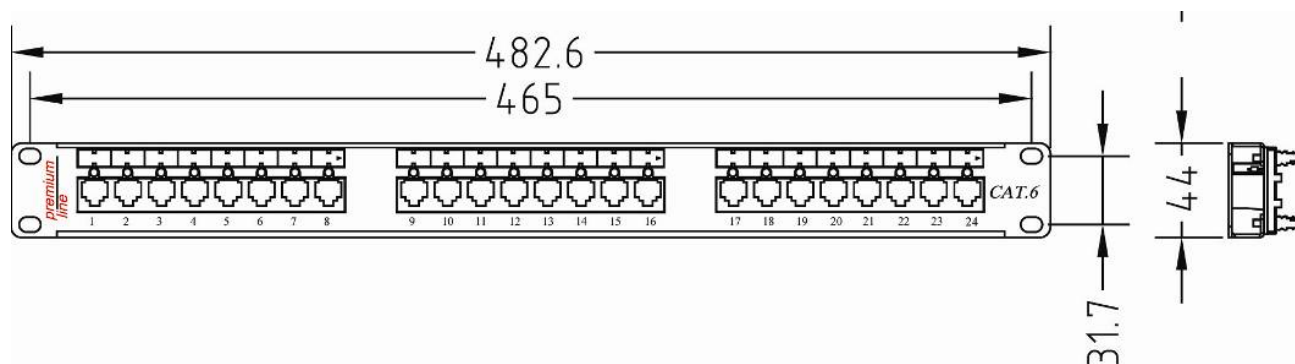
| Item | Material or Feature |
|----------------------|-------------------------------------|
| Operating life | Minimum 750 insertions |
| Contact Material | Phosphor bronze |
| Jack Contact Plating | 50μ inch thickness gold over Nickel |
| Jack Plastic Housing | Glass filled polyester UL94V-0 |

Premium Line Systems GmbH reserves the right to change specifications without prior notice.

APPLICATIONS:

- 1000BASE-TX Gigabit Ethernet
- 1000BASE-T Gigabit Ethernet
- 100Base-TX Fast Ethernet
- 10BASE-T Ethernet
- Voice, Video and other applications
- Only suitable for analog telephone systems!

TYPICAL PERFORMANCE:**Channel Performance Data for Cat.6 UTP Solution**

DRAWING:**ORDERING INFORMATION:**

Part NO. 176322412

Description Premium Line Cat.6 unshielded navigator patch panel with labeling holder, dual type IDC 24 port, black

Packing 1pc/box, 10pcs/carton, 50.4*24.5*25.5 cm weight G.W.15.2KG N.W.11.7KG

***NOTICE**

Our company's navigator Patch Panel transmits signals by 3/6 line pair, and the working principle of individual telephone systems don't appear compatible, such as Panasonic PBX/PABX, Ericsson PBX/PABX, as a result, LED light would be burnt out ,affecting normal use. Please don't use them together.

Premium-Line Systems GmbH, Rosenheimer Str.89, D-83064 Raubling, Germany**► TEL: + 49(0)8035 9836 0 ► Fax: + 49(0)8035 9836 22**