


FEATURES:

- Meets with TIA/EIA 568.3-D standard
- Panel clip for easy installation
- Snap-in designed shutter
- RoHS compliant

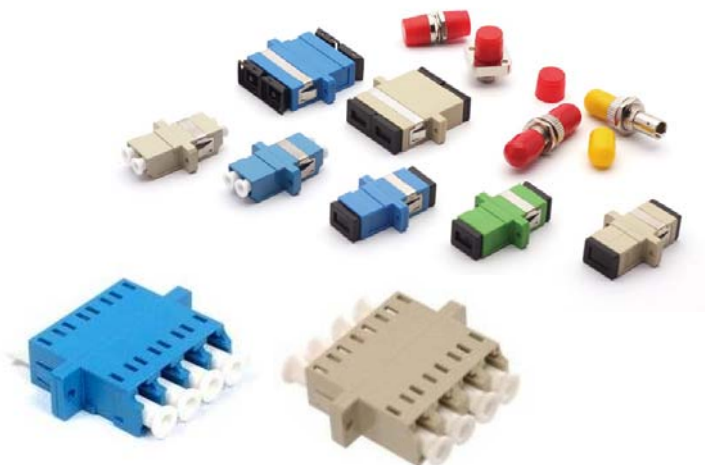

APPLICATIONS:

- Telecommunication & CATV
- LAN (including FITL, FTTH and FTTD) and Data network

TYPICAL PERFORMANCES:

Material	Zirconia Sleeve
Insertion loss	≤0.3dB
Durability(500 Mating)	0.2dB Max Increase
Operating Temperature	-20°C ~60°C
Storage Temperature	-20°C~60°C

ORDERING INFORMATION:

Part No: 231vw1xyz

Description: Fiber optic adapter, zirconia sleeve

v, mode 0: nothing 1:MM 2:SM/UPC 4:SM/APC

w, type 1:duplex 2:simplex 3:quad(LC)

x, connector 1:SC 2:ST 3:FC 4:LC T: MTP/MPO(key-up / key-up)
P: MTP/MPO(key-up / key-down)

y,fe/ma 0: nothing 1: female(FC) 2: male(FC) 6: female-male(FC)

z, color 0: no color(ST&FC) 2: black(MTP&MPO) 4: blue(SM) 6: green(APC)
8: beige(MM)

Premium Line Systems GmbH reserves the right to change specifications without prior notice.

Premium-Line Systems GmbH, Rosenheimer Str.89, D-83064 Raubling, Germany