

**FEATURES:**

- Industry Standard User Interface, be made of high impact plastic
- ABS+PC material used ensures the product strong and light
- IP 55 protection level, Anti-UV and water proof design for all weather, indoor and outdoor uses
- 6 cable inlet and outlet knock-out holes (2\*35mm, 2\*30mm, 2\*15mm)
- Apply to SC simplex adapters
- RoHS compliant



\*The SC adapters and FO pigtaills have to be ordered separately.

**ACCESSORIES:**

Items	Quantity	Items	Quantity
Integrated 24-core splice cassette	2pcs	rubber ring 30mm	2pcs
heat shrinking tube	48pcs	rubber ring 35mm	2pcs
Optical fiber protection tube 4*5.5mm	1 meter	M6*30mm expansion bolt	4 sets
nylon cable tie 3*100mm	5pcs	key	1pc

**APPLICATIONS:**


- Widely used in FTTH access network
- Telecommunication Networks
- CATV networks
- Data communications Networks
- Local area networks

*Premium Line Systems GmbH reserves the right to change specifications without prior notice.*

**OPERATION CONDITION:**

- Temperatures: -40°C -- +60°C
- Humidity: 93% at 40°C
- Air Pressure: 62kPa – 101kPa

**DRAWING:**

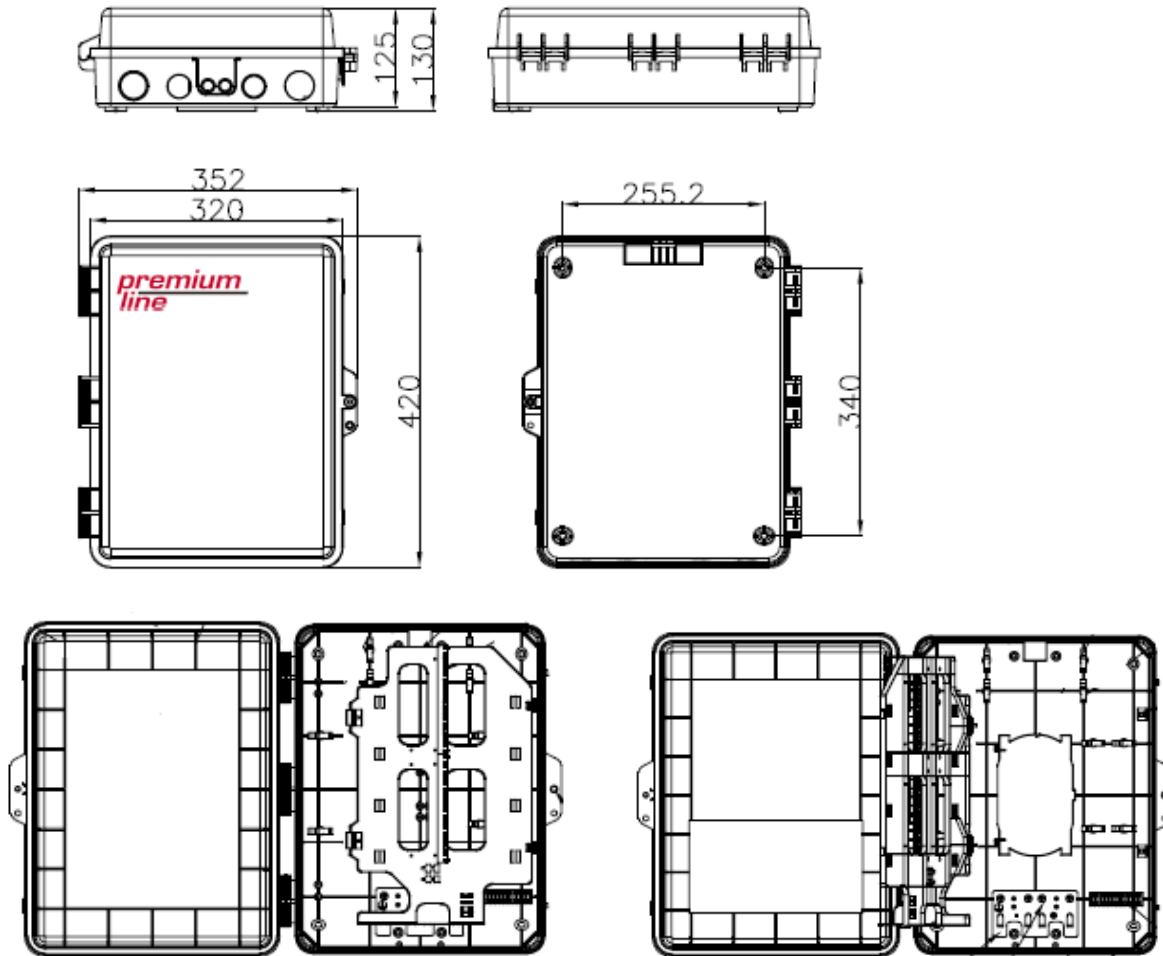

**ORDERING INFORMATION:**

Part No.	253211xx0
Description	FTTH distribution box, SC simplex type, without adapters, gray
xx, port	36: 36ports    48: 48ports
Packing	1pc/box    5pcs/carton
	carton size: 74*44.5*39.5cm    weight: N.W. 16.0KG    G.W. 17.0KG

Premium-Line Systems GmbH, Rosenheimer Str.89, D-83064 Raubling, Germany

► TEL:+49(0)8035 9836 0 ► Fax:+49(0)8035 9836 22

Premium Line Systems GmbH reserves the right to change specifications without prior notice.