

FEATURES:

Category 5e U/UTP drop flat patch cord is using:

- Flat design for space tight
- Molded snag proof boot

Compliant with Cat.5e standards as:

- ANSI/TIA 568.2-D:2018
- ISO/IEC 11801-1 Class D:2017
- CENELEC EN 50173-1:2018
- CENELEC EN 50288-3-2:2013
- IEC 61935-2:2010 (Edition 3.0)
- IEC 61156-6:2012


Compliant with safety standards as:

- IEC 60332-1-2:2004
- RJ45 plug comply with UL94 V-0
- RoHS compliant (EU Directive 2011/65/EC)



CHARACTERISTICS:

Conductor	Material / Size	Bare Copper / 30 AWG	
Insulation	Material	PE	
	Diameter	0.55 ± 0.05 mm	
Sheath	Material	PVC	LSOH
	Diameter	2.0±0.2mm × 6.2±0.3mm	
Operation Temperature		-20°C~+60°C	
Installation Temperature		0°C~+50°C	
Storage Temperature		-30°C~+60°C	

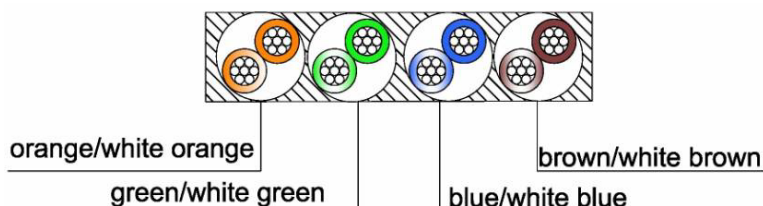


Part No. 1855xyyyz3**Ver. 2102****Product Specification****APPLICATION:**

- 1000BASE-T Gigabit Ethernet
- 100BASE-TX Fast Ethernet
- 10BASE-T Ethernet.
- Voice, Video and other applications

ORDERING INFORMATION:

Part No.	1855xyyyz3
Description	Cat.5e U/UTP flat patch cord, short boot
x: sheath	1: PVC 2: LSOH
yyy: length	003: 0.3m, 005: 0.5m, 010: 1.0m, 020: 2.0m, 030: 3.0m, 100: 10,0m
z: color	1: white, 2: black, 3: red, 4: blue, 5: grey, 6: green, 8: yellow, 9: purple
Packing	1pc/PE bag, 500pcs/ carton (length over 2meters, quantity in carton will be less than 500) carton size 42*42*25cm

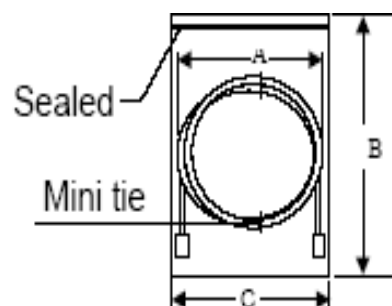**Premium-Line Systems GmbH, Rosenheimer Str. 89, D-83064 Raubling, Germany****► TEL: + 49(0)8035 9836 0 ► Fax: + 49(0)8035 9836 22***Premium Line Systems GmbH reserves the right to change specifications without prior notice.*