

FEATURES:

Compliant with Cat.5e standards as:

- ANSI/TIA 568.2-D:2018
- ISO/IEC 11801-1 Class D:2017
- CENELEC EN 50173-1:2018
- CENELEC EN 50288-3-2:2013
- IEC 61935-2:2010 (Edition 3.0)
- IEC 61156-6:2012






Compliant with safety standards as:

- IEC 60332-1-2:2004
- RoHS compliant (EU Directive 2011/65/EC)

CHARACTERISTICS:

Conductor	Material / Size	Copper Coated Aluminum / 26AWG	
Insulation	Material	HDPE	
	Diameter	0.8 ± 0.05 mm	
Sheath	Material	PVC	LSOH
	Diameter	5.3 ± 0.3 mm	5.3 ± 0.3 mm
Operation Temperature		-20°C~+60°C	
Installation Temperature		0°C~+50°C	
Storage Temperature		-30°C~+60°C	

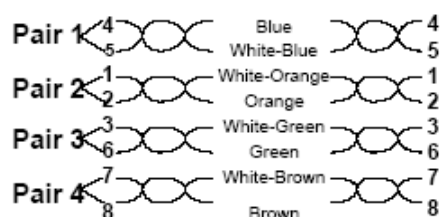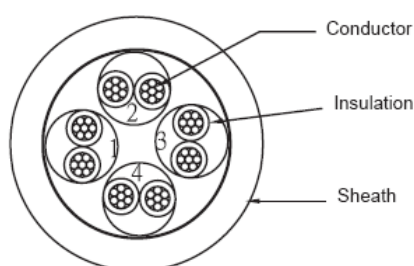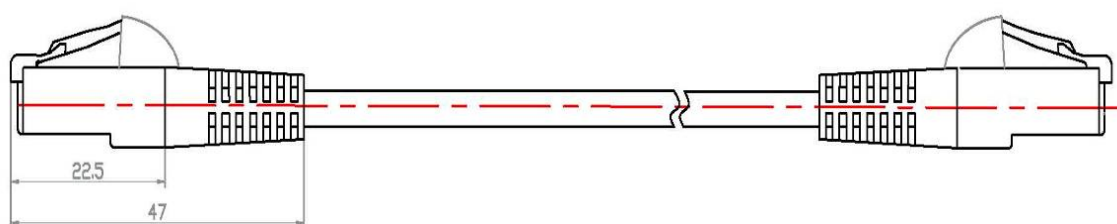


APPLICATION:

- 1000BASE-T Gigabit Ethernet
- 100BASE-TX Fast Ethernet
- 10BASE-T Ethernet
- Voice, Video and other applications

ORDERING INFORMATION:

Part No.	1857xyyyz
Description	Cat.5e U/UTP retail patch cord
x: sheath	1: PVC, 2: LSOH
yyy: length	005: 0.5m, 010: 1.0m, 020: 2.0m, 030: 3.0m, 050: 5.0m, 070: 7.0m, 100: 10.0m
z: color	1: white, 2: black, 3: red, 4: blue, 5: grey, 6: green, 8: yellow
Packing	1pc / PE bag

length	0.5m	1.0m	2.0m	3.0m	5.0m	7.0m	10.0m
quantity/carton	250pcs	200pcs	150pcs	120pcs	80pcs	70pcs	50pcs

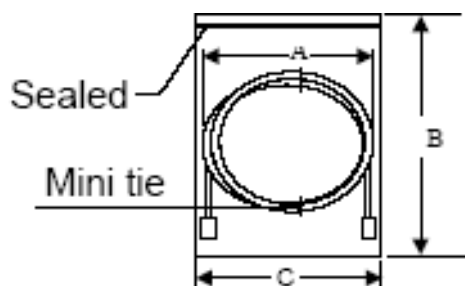

Packing	Length	$L \leq 3m$	$3m < L \leq 10m$	$10m < L$
	(A) mm	180+/-5	180+/-5	175~205
	Cable width			
	(B×C) mm			
	PE bag size	280×203	305×240	305×240
	Carton size	42*42*25cm		

Premium-Line Systems GmbH, Rosenheimer Str. 89, D-83064 Raubling, Germany

► TEL: + 49(0)8035 9836 0 ► Fax: + 49(0)8035 9836 22

Premium Line Systems GmbH reserves the right to change specifications without prior notice.